



©2018


Features	Typical value	Test standard
#Color	#gray	#Visual
volatilization rate	5%+	ZC88 A9HC8
/Density (g/cc)	2.0	5CHA 8+ &
#Viscosity (mPa·s)	1.0	5CHA 88% *
Sustainable working temperature	100-150 °C	ZC88 A9HC8
#Thermal performance		
#Thermal conductivity (W/m·K)	0.2	5CHA 8) (+S
Thermal resistance v.s. pressure (The thickness of 0.1mm sample for reference)		
#Pressure (MPa)	0.1	0.1
#Thermal impedance (K)	0.1	0.1



Q " (W)"
 K " (W/m-K)"
 "K"



θ_{jc} θ_{js} θ_{cs} θ_{js}

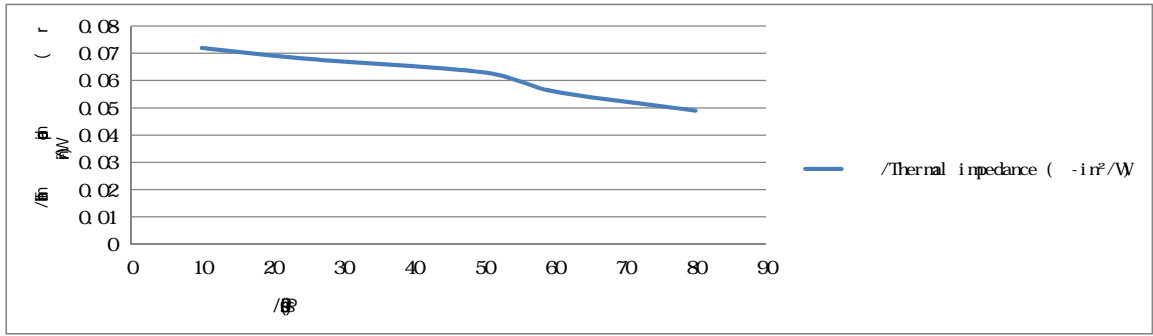

° 7

!() Žšš

#FCHG



(Tel): (86)0512-50172288

(Fax): (86)0512-50172289