


& &

LED

UL94-V0,RoHS,halogen-free

Features	Typical value	Test standard
/Color	/Yellow	/Visual
/Thickness(mm)	0.165	ASTMD374
Baseband type	Polyimide	ZOND METHOD
#Hardness(HG)cfY AL	89	ASTMD2240
/Elongation at break %	40	ASTMD412
/Tensile Strength (Mpa)	26	ASTMD412

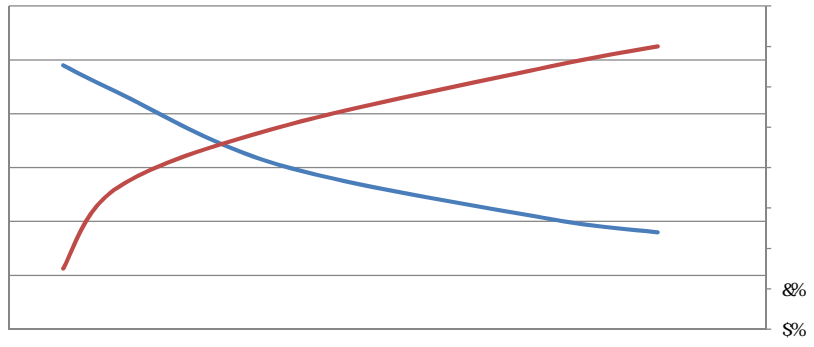

/RoHS

* *
V250mm*L100mm*TO. 15mm