

TGS-2000 T015 K



.) P'%'# Ÿ™7Ò

'#1x*< +k.÷1x*< 2Í Ü1x*<

Q 2'#™'# †İ }#Æ#¼Lš vG '#&i +,M~ 2'# , IÄF8+^,Q %M-]

(©&é ¼ H i

Ä+X

6FQ \$_
Q 2#]
Q #Ü%]
„ Ÿ 31 i
Q L œ0i Ð]
% ‡]
ÍM=]

°73Aô =
FPAâAô =
æ73\$Æ
+k †Aô =
/ ('
q+Í ž æ
8`0°8` _

' @

.) P'%'


.) P2i

[] Features	® Á r Typical value	#•B = ü Test standard	
Ð Ü 7RWDO PDWHULDO WKLFN	0.15	ASTM D374	
√7,2± Á z	A2	/	
/ñ Á7Ò 5HOHDVLQJ /LQHU XP	PET 75/PET 75	/	
2'#31 i': P g. µ	= i G	2.0	ASTM D5470
	; < i G	500	ASTM E1461
ÍÿpÜ 7HQVLOH 6WUHQJWK 03	10	ASTM D412	
10µ+k Á %UHDNGRZQ 9ROWDJH	6.0	ASTM D149	
%0%+kLq)½ 5HVLVWLYLW\ ¥ FP	10 ¹²	ASTM 257	
Lq'ù])ODPH 5HWDUGDQW 5DWL	V-0	UL 94	
KµU '\$_Ü 2SHUDWLRQ 7HPSHUD		/	


Æ

7 \$ >ž/p Ÿ ÷F >, M77, Ç

u+^.) P'%'# Ÿ™7Ò f

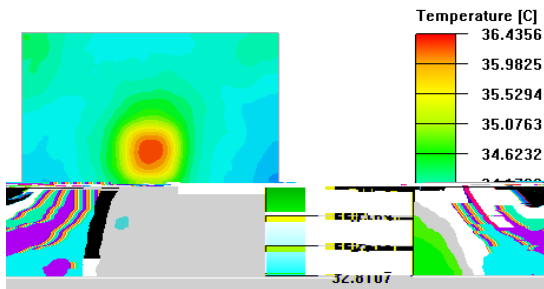

u+^.) P'%'# Ÿ™7Ò D

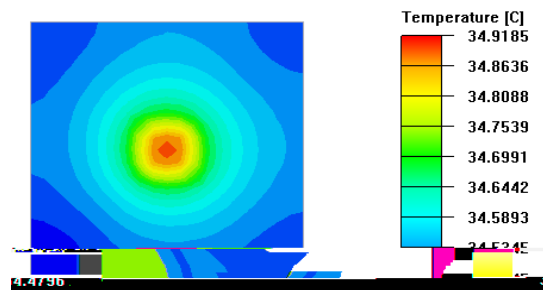

ÿF

.) P'%' C ># Ÿ™7Ò e 60 ž æ,° 2'#™'# †İ , -
?)"(,° -2È G , "õ Z` iG `j© = , - * µ } 6
2'# , { } x(i5 ° % ¼³ fF8+^ 1 <žM~ , ...;s'#\$Æ
Ä4ú ,,° B , oF #¼Co2±+k † Ÿ ÷,°]73 >

(© W

Ÿ ÷ - ?C^E± =™'#EÜFU J % Ê+^ 1 <žM~ ,°(&i , -)"(,° - %05 ° , 8* µ ©M~ » - ?Q 2'#] , % !FU01Lš'#&i , Lf „\$_ Ü >

