
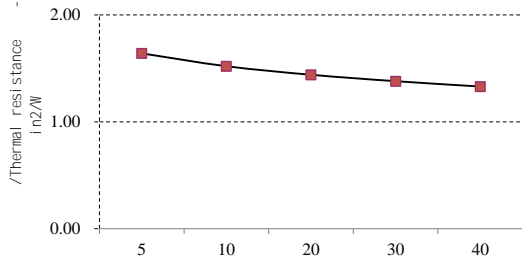


	A	B			
	Component-A	Component-B			
/Color	/Black	/White			
	1408	1640			ASTM D2196
	1	1			
/Performance after mixing					
			55		
/Tensile strength(Psi)					
/Elongation at break(%)			40		ASTM D412
Volume resistivity ( -cm)			$4.0 \times 10^{14}$		
			V-0		
					ZOND METHOD
					ZOND METHOD
/Curing condition					ZOND METHOD
100 min					
	5	10	20	30	40
	1.64	1.52	1.44	1.38	1.33



5.

6. /

25

100g

--- --- ( )

1. A B ( ) 1:1

2.

3. 1:1 ,  
5-10

4.

/RnHS


12 ;

15 < T < 30 ;

RH<70% .

3 5 )  
5 30

Web: www.zhongdi tech. com



2018

All rights 2018 reserved by Zond